

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 April 2001 (12.04.2001)

PCT

(10) International Publication Number
WO 01/25328 A1

(51) International Patent Classification⁷: C08L 23/16

(21) International Application Number: PCT/CA00/01079

(22) International Filing Date:
26 September 2000 (26.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2,285,723 7 October 1999 (07.10.1999) CA

(71) Applicant (for all designated States except US): NOVA
CHEMICALS (INTERNATIONAL) S.A. [CH/CH];
Chemin des Mazots 2, CH-1700 Fribourg (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KAZAKOV, Alexei
[CA/CA]; 27 Sanderling Rise NW, Calgary, Alberta T3K
3B1 (CA). BROWN, Stephen, John [CA/CA]; 157
Mount Sparrowhawk Place SE, Calgary, Alberta T2Z 2G7
(CA). DOBBIN, Christopher, John, Brooke [CA/CA];

187 Rocky Ridge Landing NW, Calgary, Alberta T3G 4J7
(CA). GRABOW, Stan, Allan [CA/CA]; Site 12, Box 48,
RR#4, Calgary, Alberta T2M 4L4 (CA).

(74) Agents: CHISHOLM, P., Scott et al.; Nova Chemicals
Corporation, 2928 - 16 Street NE, Calgary, Alberta T2E
7K7 (CA).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

[Continued on next page]

(54) Title: MULTIMODAL POLYOLEFIN PIPE

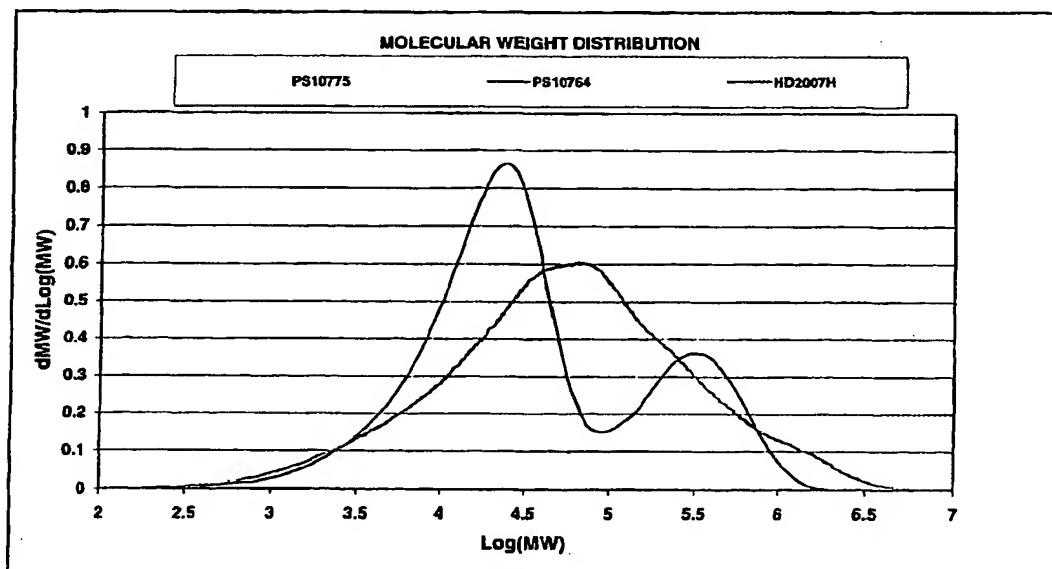

(57) Abstract: A solution polymerization process in a series or parallel of two or more reactors at different temperatures is used to prepare a multimodal polyolefin resin of narrow molecular weight distribution. This resin is used to manufacture melt extruded pipe that has an improved performance at elevated temperatures and an improved hydrostatic design.

WO 01/25328 A1